



## VHF AND UHF TRANSCEIVERS

### IC-F1000T

VHF transceiver with full keypad

### IC-F1000S

VHF transceiver with simple keypad

### IC-F1000

VHF transceiver without LCD and front keypad

### IC-F2000T

UHF transceiver with full keypad

### IC-F2000S

UHF transceiver with simple keypad

### IC-F2000

UHF transceiver without LCD and front keypad

# Compact, Slim Dimensions IP67 Waterproofing and Full of Useful Features

#### IP67 Waterproof and Dust-tight Protection

The IC-F1000 series has a 24.5mm (0.96 in) slim depth with IP67 waterproof casing. The transceiver can withstand 1m depth of water for 30 minutes. Its dust-tight construction prevents the ingress of powder dust, sand, mud and other objects.

#### Enhanced Emergency with Built-in Motion Sensor

With a built-in motion sensor, the IC-F1000 series can detect its position, state of motion and non-motion and can send an emergency signal. The motion function detects if the transceiver is moving or shaking, for example, during a chase. The lone worker and man down functions are programmable.

#### Selective Calling, Quiet Stand-by and More

The IC-F1000 series has built-in 2-Tone, 5-Tone, CTCSS and DTCS signaling capabilities for group communication and selective calling.

#### MDC 1200 Compatible

The following MDC features are programmable.

- PTT ID • Emergency (No ACK transmission)
- Radio check (RX only) • Stun/Revive (RX only)
- Transmit status messages (LCD types only)
- 100 alias table (LCD types only)

#### Easy to Hear in Noisy Areas

The large 36mm speaker of the transceiver provides clear compounded 800 mW\* audio. The built-in BTL amplifier doubles the audio output power and delivers loud and intelligible voice to a radio operator working in noisy environments.

\* Typical with internal speaker

#### Channel Announcement

When you rotate the channel knob, the radio announces the channel number. Convenient for making radio adjustments without having to look at the radio.

#### Built-in inversion voice scrambler

The built-in inversion voice scrambler provides secure conversation. Up to 16 codes are selectable.

#### 14 Hours of Operating Time

The supplied waterproof Li-Ion battery pack, BP-279 (7.2V DC, 1485mAh), provides 14 hours\* of operating time.

\* Tx:Rx:Standby=5:5:90. Power save function ON.

#### Other Features

- 8 DTMF autodial memories
- "Shift key" function increases number of programmable key assignments
- Surveillance function • Escalating alarm
- Optional HM-168LWP, waterproof speaker-mic



IC-F2000T

IC-F1000S

IC-F1000  
(with optional stubby antenna)



Limited functions.

## SPECIFICATIONS

	IC-F1000/S/T	IC-F2000/S/T
<b>GENERAL</b>		
Frequency coverage (MHz)	136-174MHz	335-400MHz (EXP), 400-470MHz (USA/EXP), 450-512MHz (USA), 450-520MHz (EXP)
Number of channels	IC-F1000/F2000 IC-F1000T/S, F2000T/S	16 channels 128 channels
Type of emission	16K0F3E*/11K0F3E	
Channel spacing	12.5/25kHz (Not USA Version)	
Power supply requirement	7.5V DC nominal	
Current drain (typical)		
Tx High	1.3A	1.3A
Rx Max. audio/Standby	330mA (Internal SP)/77mA	300mA (Internal SP)/80mA
Antenna impedance	50Ω	
Operating temperature range	-30°C to +60°C; -22°F to +140°F (Radio specification)	
Dimensions (WxHxD) (Projections not included)	52.2x111.5x24.5mm; 2.06x4.39x0.96 in (With BP-279)	
Weight (approx.)	240g; 8.47oz (With BP-279)	
<b>TRANSMITTER</b>		
Output power	5W, 2W, 1W (Hi, L2, L1)	4W, 2W, 1W (Hi, L2, L1)
Max. frequency deviation	± 5.0kHz/±2.5kHz (Wide/Narrow)	
Frequency stability	±2.5ppm	
Spurious emissions	70dB min.	
FM Hum and noise	46/40dB typ. (Wide/Narrow)	
Audio harmonic distortion	1.0%/1.5% typ. (W/N, AF 1kHz 40% deviation)	
Ext. microphone connector	3-conductor 2.5 (d) mm (1/16")/2.2kΩ	
<b>RECEIVER</b>		
Sensitivity (at 12dB SINAD)	0.25μV typ.	
Adjacent channel selectivity	76/53dB typ. (W/N)	73/56dB typ. (W/N)
Spurious response	70dB min.	
Intermodulation	74dB typ.	73dB typ.
Hum and noise	51/45dB typ. (W/N)	49/43dB typ. (W/N)
Audio output power		
Internal SP (With 12Ω load)	800mW typ. (at 5% distortion)	
External SP (With 8Ω load)	400mW typ. (at 5% distortion)	
External speaker connector	2-conductor 3.5 (d) mm (1/8")/8Ω	

Measurements made in accordance with TIA-603.

All stated specifications are subject to change without notice or obligation.

\* 25kHz bandwidth is no longer available for FCC Part 90 licensees for USA versions. Ask your dealer if you need 25kHz bandwidth.

### Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	-
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I, IV
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

### Ingress Protection Standard

Dust & Water	IP67 (Dust-tight and waterproof protection)
--------------	---

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. All trademarks are the properties of their respective holders.

## OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.




Battery packs	Type and capacity	Operating time*
BP-278	Li-Ion, 7.2V 1130mAh	10 hours (Approx.)
BP-279	Li-Ion, 7.2V 1485mAh	14 hours (Approx.)

\* Tx: Rx: standby = 5:5:90. Power save function ON.



\*1 BC-123SA for 120V AC. SE for 230V AC. SV for 240V AC.



Charges up to six BP-279 battery packs in 2.5 hours (approx.).




CP-23L For use with BC-213  
OPC-656 For use with BC-214




HM-168LWP HM-158LA HM-159LA




HM-153LA HM-166LA

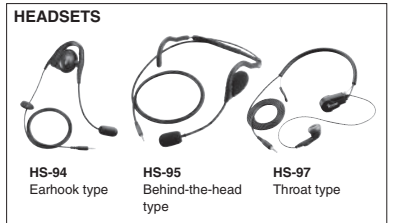

HS-94 Earhook type  
HS-95 Behind-the-head type  
HS-97 Throat type



VS-4LA \* VS-4LA is required when using the HS-94, HS-95 and HS-97.  
MB-133 Alligator type Same as supplied.



MB-130 For use with BC-213

### STANDARD ANTENNAS

- FA-SC25V : 136-150MHz
- FA-SC55V : 150-174MHz
- FA-SC25U : 400-430MHz
- FA-SC57U : 430-470MHz
- FA-SC72U : 470-520MHz

### CUT ANTENNAS

- FA-SC61VC : 136-174MHz
- FA-SC61UC : 380-520MHz

### HIGH GAIN ANTENNAS

- FA-SC62V : 150-160MHz
- FA-SC63V : 155-165MHz

### STUBBY ANTENNAS

- FA-SC56VS : 150-162MHz
- FA-SC57VS : 160-174MHz
- FA-SC73US : 450-490MHz

### CHARGER ADAPTER

- AD-130 AD-130 charger adapter is supplied with the BC-214.

**Supplied accessories:** (May differ depending on version)  
 • Battery pack, BP-279 • Desktop charger, BC-213 • AC adapter, BC-123S  
 • Belt clip, MB-133 • Antenna



The "3D GENUINE Icom label" is attached to the rear chassis under the battery. Check the Icom website for details: <http://www.icom.co.jp/world/genuine-info/>

## Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

[www.icom.co.jp/world](http://www.icom.co.jp/world)

## Count on us!

### Icom America Inc.

12421 Willows Road NE,  
Kirkland, WA 98034, U.S.A.  
Phone : +1 (425) 454-8155  
Fax : +1 (425) 454-1509  
E-mail : [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL : <http://www.icomamerica.com>

### Icom Canada

Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone : +1 (604) 952-4266  
Fax : +1 (604) 952-0090  
E-mail : [info@icomcanada.com](mailto:info@icomcanada.com)  
URL : <http://www.icomcanada.com>

### Icom Brazil

Rua Itororó, 444 Padre Eustáquio  
Belo Horizonte MG,  
CEP: 30130-150, Brazil  
Phone : +55 (31) 3582 8847  
Fax : +55 (31) 3582 8987  
E-mail : [sales@icombrazil.com](mailto:sales@icombrazil.com)

### Icom (Europe) GmbH

Communication Equipment  
Auf der Krautweide 24  
65812 Bad Soden am Taunus, Germany  
Phone : +49 (6196) 76685-0  
Fax : +49 (6196) 76685-50  
E-mail : [info@icomeurope.com](mailto:info@icomeurope.com)  
URL : <http://www.icomeurope.com>

### Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone : +34 (93) 590 26 70  
Fax : +34 (93) 589 04 46  
E-mail : [icom@icomspain.com](mailto:icom@icomspain.com)  
URL : <http://www.icomspain.com>

### Icom Polska Sp. z o.o.

80-286 Gdansk, Jaskowa Dolina St. 75, Poland  
Phone : +48 (58) 551 0484  
Fax : +48 (58) 551 4720  
E-mail : [icom.polska@icompolksa.com.pl](mailto:icom.polska@icompolksa.com.pl)  
URL : <http://www.icompolksa.com.pl>

### Icom (UK) Ltd.

Blacksole House, Altira Park,  
Herne Bay, Kent, CT6 6GZ, U.K.  
Phone : +44 (0) 1227 741741  
Fax : +44 (0) 1227 741742  
E-mail : [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL : <http://www.icomuk.co.uk>

### Icom France s.a.s.

Zac de la Plaine,  
1 Rue Brindejonc des Moulinais, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone : +33 (5) 61 36 03 03  
Fax : +33 (5) 61 36 03 00  
E-mail : [icom@icom-france.com](mailto:icom@icom-france.com)  
URL : <http://www.icom-france.com>

### Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,  
Clayton, VIC 3169 Australia  
Phone : +61 (03) 9549 7500  
Fax : +61 (03) 9549 7505  
E-mail : [sales@icom.net.au](mailto:sales@icom.net.au)  
URL : <http://www.icom.net.au>

### Icom New Zealand

146A Harris Road, East Tamaki,  
Auckland, New Zealand  
Phone : +64 (09) 274 4062  
Fax : +64 (09) 274 4708  
E-mail : [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL : <http://www.icom.co.nz>

### Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone : +886 (02) 2559 1899  
Fax : +886 (02) 2559 1874  
E-mail : [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL : <http://www.asia-icom.com>

### Shanghai Icom Ltd.

No.101, Building 9, Caifuxingyuan Park,  
No.188 Maoting Road, Chedun Town,  
Songjiang District, Shanghai, 201611, China  
Phone : +86 (021) 6153 2788  
Fax : +86 (021) 5765 9987  
E-mail : [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
URL : <http://www.bjicom.com>

Your local distributor/dealer:

# HiTechWireless

Phone: 888.511.5162  
Fax: 866.341.3315  
Email: [sales@hitechwireless.com](mailto:sales@hitechwireless.com)  
[www.HiTechwireless.com](http://www.HiTechwireless.com)

As of March, 2014 this device has not been approved by the Federal Communications Commission. This device may not be sold or leased, or be offered for sale or lease, until approval of the FCC has been obtained.