

**ICOM**

VHF AND UHF TRANSCEIVERS

**IC-V86  
IC-U86**



IC-V86



# 7 W Output Power and 1500 mW Audio



**7 W output power plus new antenna provides 1.5 times\* more coverage**

\* Approximately, compared to 5.5 W radio (IC-V80). Wide open space. Communication range may differ depending on operating environment or weather conditions, etc. 7 W output power is only for the IC-V86.

**More audio, 1500 mW audio output**

**IP54 and MIL-STD 810G; rugged design against dust, water, vibration and shock. Perfect for outdoor use.**

**19 hours\* of long lasting battery life**


\* EX Hi power with BP-298. TX : RX : standby = 5 : 5 : 90 (3 sec. : 3 sec. : 54 sec.)  
(The Power Save function is set to "P-S.16")

**Durable BNC antenna connector**

**Made in Japan quality and reliability**

**And more**

- User selectable Volume Level, VFO/Memory Channel selection control
- Supplied BC-240, battery charger with a charging control function that prolongs the life of the battery
- Integrated VOX function
- 200 memory channels, 1 Call channel and 6 scan edges
- Built-in CTCSS and DTCS encoder/decoder and Tone Scan
- Priority, program, memory, skip and tone scanning

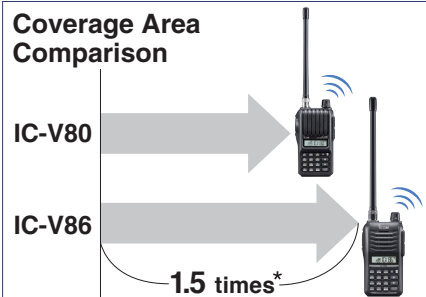

\* Wide open space



IC-U86



**SPECIFICATIONS**

GENERAL	IC-V86	IC-U86
Frequency range (Guaranteed range)	TX: 144-148 MHz RX: 136-174 MHz	TX: 430-450 MHz RX: 400-472 MHz
Type of emissions	F2D, F3E (FM, FM-N)	
Number of channels	207 channels (200 memory channels, 1 call channel and 6 scan edges)	
Antenna impedance	50 Ω	
Power supply requirement	7.5 V DC	
Operating temperature range	-20 °C to +60 °C, -4 °F to +140 °F	
Frequency stability	±2.5 ppm (-20 °C to +60 °C, -4 °F to +140 °F)	
Current drain TX (EX Hi/Hi/Mid/Low) RX (Max. audio)	1.6/1.4/1.0/0.5 A typical 450 mA typ. (INT SP), 200 mA typ. (EXT SP)	1.6/1.5/1.0/0.5 A typical 450 mA typ. (INT SP), 200 mA typ. (EXT SP)
Dimensions (W×H×D) (Projections not included)	58.6 × 112 × 30.5 mm, 2.3 × 4.4 × 1.2 in (with BP-298)	
Weight (Approximate)	300 g, 10.6 oz (with BP-298, FA-B57V)	290 g, 10.2 oz (with BP-298, FA-B57U)
TRANSMITTER		
Output power	7.0/5.5/2.5/0.5 W (EX Hi/Hi/Mid/Low)	5.5/4.2/0.5 W (EX Hi/Hi/Mid/Low)
Maximum frequency deviation	±5.0 kHz/±2.5 kHz (Wide/Narrow)	
Spurious emissions	Less than -60 dB	
External microphone connector	3-conductor 2.5 (d) mm (1/10")/2.2 kΩ	
RECEIVER		
Sensitivity	-124 dBm typical	-121 dBm typical
Squelch sensitivity	-126 dBm typical	-123 dBm typical
Selectivity (Wide/Narrow)	75 dB typical/70 dB typical	70 dB typical/68 dB typical
Intermodulation	65 dB typical	
Audio output power Internal speaker External speaker	1500 mW typical (with 8 Ω load) 550 mW typical (with 8 Ω load)	
External speaker connector	3-conductor 3.5 (d) mm (1/8")/ 8 Ω	

All stated specifications are subject to change without notice or obligation.

**Applicable U.S. Military Specifications & IP Rating**


Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	-
Dust Blowing	510.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard	
Dust and Water	IP54 (Dust-protection, water resistance)

**Supplied accessories :** (\* May differ, depending on transceiver version)  
 ●BP-298/BP-264 battery pack ●BC-240, desktop charger ●BC-242, AC adapter  
 ●MB-124, belt clip ●Antenna\*

**Countermeasures against Counterfeit Products**  
 The "3D GENUINE Icom label" and "QR Code Genuineness Determination System" are attached for proof of authentication.  
 Check the Icom website for details : <http://www.icom.co.jp/world/genuine-info/>




Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. QR Code is registered trademark of DENSO WAVE INCORPORATED in Japan and in other countries. All trademarks are the properties of their respective holders.

**OPTIONS**

**BATTERY PACKS & CASE**

Battery pack type	Capacity	Operating time*
<b>BP-298</b> Rechargeable Li-ion	2100 mAh (min.) 2250 mAh (typ.)	Up to 19 hours
<b>BP-299</b> Rechargeable Li-ion	3050 mAh (min.) 3150 mAh (typ.)	Up to 27 hours
<b>BP-264</b> Rechargeable Ni-MH	1400 mAh	Up to 12.5 hours
<b>BP-263</b> AA (LR6) batteries × 6	—	—

\* EX Hi power. TX : RX : standby = 5 : 5 : 90 (3 sec. ; 3 sec. ; 54 sec. ) (The Power Save function is set to "P-S.16")




**RAPID CHARGERS**  
**BC-240** Rapid charger for BP-298/BP-299  
**BC-191** Rapid charger for BP-264

**DESKTOP CHARGER**  
**BC-192** Regular charger for BP-264



**MULTI-CHARGER**  
**BC-214N\*** For BP-298/BP-299

**MULTI-CHARGER**  
**BC-197\*** For BP-264



\* The AD-139/AD-120 charger adapters are supplied with the BC-214N/BC-197, depending on the charger version.


**SPEAKER-MICROPHONES**

**EARPHONE-MICROPHONES**



**HEADSETS**  
**HS-94LWP** Ear-hook type with a waterproof connector  
**HS-95LWP** Behind-the-head type with a waterproof connector  
**HS-97\*** Throat type  
 \*Either the VS-4LA or OPC-2004LA is required when using the HS-97

**PTT SWITCH CABLE & PLUG ADAPTER CABLE**  
**VS-4LA**  
 For manual PTT operation  
**OPC-2004LA**  
 For VOX operation




**CIGARETTE LIGHTER CABLE**  
**CP-23L**

**DC POWER CABLE**  
**OPC-656** **OPC-515L**

**CHARGER BRACKET**  
**MB-130**

**BELT CLIP**  
**MB-124**



**ANTENNAS**  
**FA-B45V** 144-148 MHz  
**FA-B57V** 160 MHz  
**FA-B57U** 430-450 MHz

**PROGRAMMING CABLES**  
**OPC-478UC** Handheld to PC USB cable  
**OPC-474** Handheld to handheld

**PROGRAMMING SOFTWARE**  
**CS-V86** Programming software

**Icom Inc.** 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 [www.icom.co.jp/world](http://www.icom.co.jp/world) **Count on us!**

<b>Icom America Inc.</b> <a href="http://www.icomamerica.com">www.icomamerica.com</a>	<b>Icom (Europe) GmbH</b> <a href="http://www.icomeurope.com">www.icomeurope.com</a>	<b>Icom (Australia) Pty. Ltd.</b> <a href="http://www.icom.net.au">www.icom.net.au</a>	Your local distributor/dealer:  Tel: 888.511.5162 Fax: 866.341.3315 sales@hitechwireless.com HiTechWireless.com
<b>Icom Canada</b> <a href="http://www.icomcanada.com">www.icomcanada.com</a>	<b>Icom Spain S.L.</b> <a href="http://www.icomspain.com">www.icomspain.com</a>	<b>Shanghai Icom Ltd.</b> <a href="http://www.bjicom.com">www.bjicom.com</a>	
<b>Icom Brazil</b> E-mail: sales@icombrasil.com	<b>Icom (UK) Ltd.</b> <a href="http://www.icomuk.co.uk">www.icomuk.co.uk</a>		
	<b>Icom France s.a.s.</b> <a href="http://www.icom-france.com">www.icom-france.com</a>		